


## TRY-LOCK

kontakt@arste.pl | www.arste.pl



## SUITABLE FOR:

- Cable basket solutions
- Cable tray solutions
- Long suspensions

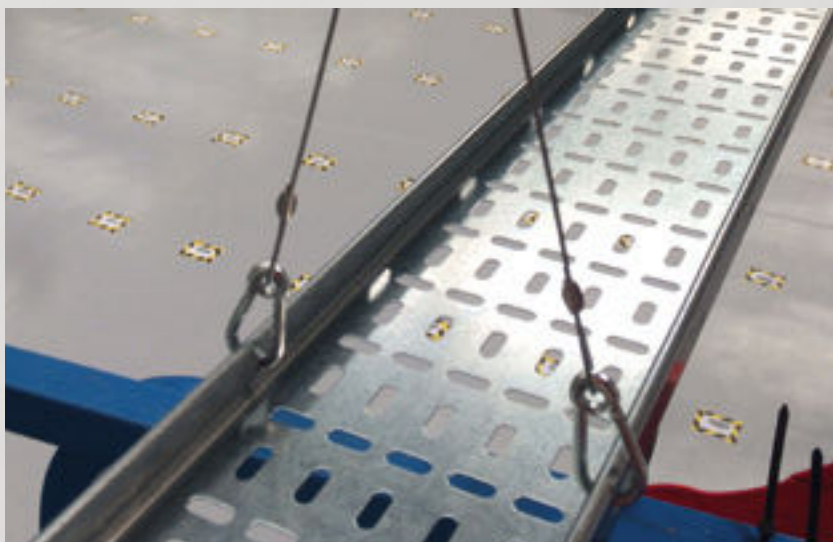

## The Specifics:

The range consists of two pre-determined lengths of wire to support basket and tray with the following Safe Working Load:

- 5 50kg

Designed to be used in conjunction with Rize, Zip-Lock, Loop-It, Con-Lock, Dec-Lock, Shot-Lock and Uni-Lock.

## The Applications

Suitable for suspending containment and bracketry:

- Channel supports
- Cable basket
- Cable tray
- Channel supports

## The Features and Benefits

- Reduces the use of studding and channel
- One fixing point per drop
- Ensures services are level
- Allows for side loading
- Height can be adjusted at basket and not at fixing
- Can be fixed to basket at ground level
- Plastic protection sleeve preventing wire on wire friction
- 5 x 50 BZP carabiner hook
- Eyelets prevent accidental un-hooking of carabiner from wire
- High tensile galvanised wire 1960 N/mm<sup>2</sup> grade 7 x 7 construction
- BSEN 12385 Standard
- Safety factor: 5:1

## The Installation

- The attachment of the Try-Lock system can be done at ground level
- Clip the carabiner to one side of the product to be suspended
- Clip the other carabiner to the other side of the product to be suspended
- Pass the free end of the wire from your top suspension through the zip-clip in the direction of the arrow
- Pass through the plastic protected loop of the Try-Lock and back through the zip-clip leaving 15cm of wire protruding
- Always confirm engagement of the zip-clip on the wire by pushing the pin in the opposite direction to the arrows indicated
- Legs should not exceed 60 degrees

CODE	DESCRIPTION	SWL	PACK QTY
TRS50-200	Eyelet carabiner suspension system suitable for spans of 50-200mm	50kg	10
TRS300-400	Eyelet carabiner suspension system suitable for spans of 300-400mm	50kg	10



FOR SUPPORTING  
INDIVIDUAL SERVICE RUNS

