


Y-IT

kontakt@arste.pl | www.arste.pl



SUITABLE FOR:

- Cable basket solutions – Carabiner
- Cable tray solutions – Toggle
- Lighting fittings
- Installing in small voids

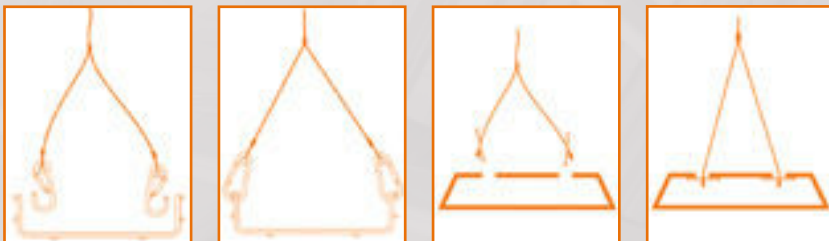

The Specifics:

The range consists of a pre-determined length of wire from 1 metre to 3 metres with a choice of Safe Working Loads:

Carabiner end:

- S 50kg SWL
- Y 90kg WL

Toggle end:

- G 15kg SWL
- S 35kg SWL
- Y 90kg SWL

The system consists of a pre-determined length of wire with a second ferruled leg and a choice of either carabiner or toggle ends.

The Applications

Carabiner end:

- Channel supports
- Cable basket
- Cable tray

Toggle end:

- Lighting fixings
- Basket, ladder and tray

The Features and Benefits

- Key free release system
- High tensile galvanised wire 1960N/mm² grade 7 x 7 construction
- BSEN 12385 standard
- One fixing point per drop
- Allows for side loading
- Can be fixed at ground level
- Reduces the use of studding and channel
- Ideal for short suspensions
- Ensures services hang level
- Safety factor: 5:1

The Installation

Installing the carabiners:

- Clip one carabiner to one side of the product to be suspended
- Clip the other carabiner to the other side of the product to be suspended

Installing the toggles:

- Attach the two toggles to the system being suspended
- By inverting the toggle parallel to the wire the toggle will swing through 90 degrees
- Ensure hole is no larger than 12mm diameter
- Pass the free end of the wire through the zip-clip in the direction of the arrow
- Pass through or around your required suspension point and back through the zip-clip leaving 15cm of wire protruding
- Always confirm engagement of the zip-clip on the wire by pushing the pin in the opposite direction to the arrows indicated

CODE	DESCRIPTION	SWL	PACK QTY
YTR1S/300	1 Mtr x 300mm eyelet carabiner suspension system	50kg	10
YTR2S/300	2 Mtr x 300mm eyelet carabiner suspension system	50kg	10
YTR3S/300	3 Mtr x 300mm eyelet carabiner suspension system	50kg	10
YTR1S/460	1 Mtr x 460mm eyelet carabiner suspension system	50kg	10
YTR2S/460	2 Mtr x 460mm eyelet carabiner suspension system	50kg	10
YTR3S/460	3 Mtr x 460mm eyelet carabiner suspension system	50kg	10
YTR1Y/300	1 Mtr x 300mm eyelet carabiner suspension system	90kg	10
YTR2Y/300	2 Mtr x 300mm eyelet carabiner suspension system	90kg	10
YTR3Y/300	3 Mtr x 300mm eyelet carabiner suspension system	90kg	10
YTR1Y/460	1 Mtr x 460mm eyelet carabiner suspension system	90kg	10
YTR2Y/460	2 Mtr x 460mm eyelet carabiner suspension system	90kg	10
YTR3Y/460	3 Mtr x 460mm eyelet carabiner suspension system	90kg	10
YLM1G/300	1 Mtr x 300mm toggle suspension system	15kg	10
YLM2G/300	2 Mtr x 300mm toggle suspension system	15kg	10
YLM3G/300	3 Mtr x 300mm toggle suspension system	15kg	10
YLM1G/600	1 Mtr x 600mm toggle suspension system	15kg	10
YLM2G/600	2 Mtr x 600mm toggle suspension system	15kg	10
YLM3G/600	3 Mtr x 600mm toggle suspension system	15kg	10
YLM1S/300	1 Mtr x 300mm toggle suspension system	35kg	10
YLM2S/300	2 Mtr x 300mm toggle suspension system	35kg	10
YLM3S/300	3 Mtr x 300mm toggle suspension system	35kg	10
YLM1S/460	1 Mtr x 460mm toggle suspension system	35kg	10
YLM2S/460	2 Mtr x 460mm toggle suspension system	35kg	10
YLM3S/460	3 Mtr x 460mm toggle suspension system	35kg	10
YLM1Y/300	1 Mtr x 300mm toggle suspension system	90kg	10
YLM2Y/300	2 Mtr x 300mm toggle suspension system	90kg	10
YLM3Y/300	3 Mtr x 300mm toggle suspension system	90kg	10
YLM1Y/460	1 Mtr x 460mm toggle suspension system	90kg	10
YLM2Y/460	2 Mtr x 460mm toggle suspension system	90kg	10
YLM3Y/460	3 Mtr x 460mm toggle suspension system	90kg	10

FOR SUPPORTING
INDIVIDUAL
SERVICE RUNS

